



YAMAHA

RD350/250





SPECIFICATIONS

RD350

ENGINE

Type 2-stroke, water cooled, twin
 Displacement 347 cm³
 Bore & Stroke 64.0 x 54.0 mm
 Compression ratio 6.9 : 1
 Maximum horsepower 34.6 kW (47 bhp)
 @8,500 rev/min.
 Maximum torque 39.2 Nm (4.0 kg-m)
 @8,000 rev/min.

Lubrication system Autolube
 Starting Kick
 Transmission 6 gears

DIMENSIONS

Overall length 2,055 mm
 Overall width 750 mm
 Overall height 1,090 mm
 Wheel base 1,555 mm
 Min. ground clearance 170 mm
 Seat height 785 mm
 Weight (Net) 143 kg
 Fuel tank capacity 17.0 lit.
 Oil tank capacity 1.8 lit.
 Tires front 3.00-18-4PR
 rear 3.50-18-4PR
 Brakes front Disc
 rear Drum

Specifications subject to change without notice.

SPECIFICATIONS

RD250

ENGINE

Type 2-stroke, water cooled, twin
 Displacement 247 cm³
 Bore & Stroke 54.0 x 54.0 mm
 Compression ratio 7.0 : 1
 Maximum horsepower 26.1 kW (35.5 bhp)
 @8,500 rev/min.
 Maximum torque 30.2 Nm (3.1 kg-m)
 @8,000 rev/min.

Lubrication system Autolube
 Starting Kick
 Transmission 6 gears


DIMENSIONS

Overall length 2,055 mm
 Overall width 750 mm
 Overall height 1,090 mm
 Wheel base 1,360 mm
 Min. ground clearance 170 mm
 Seat height 785 mm
 Weight (Net) 139 kg
 Fuel tank capacity 17.0 lit.
 Oil tank capacity 1.8 lit.
 Tires front 3.00-18-4PR
 rear 3.50-18-4PR
 Brakes front Disc
 rear Drum


Specifications subject to change without notice.




RADIATOR

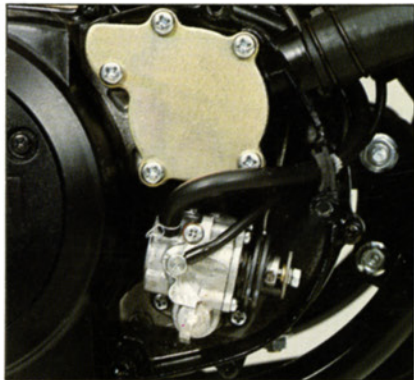

AUTOLUBE

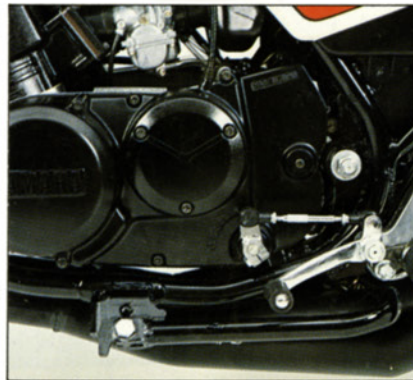

TRANSMISSION

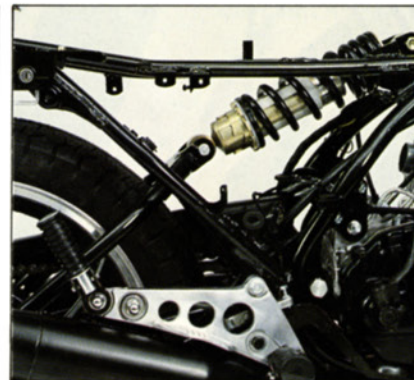

MONOCROSS SUSPENSION



SPEEDOMETER & TACHOMETER



YAMAHA MOTOR N. V.

Postbus 7829 PROF. E. M. Meyerslaan 3
 Amstelveen (Amsterdam), Holland